



Spotlight G7L Serie


LED Bluetooth Framing Projector



Quick Start Manual


Installation into the 2/3 circuit track

- Slide the 2/3 circuit track module into a compatible circuit track,
- Pull the trigger to fix the position,
- Turn the rotary knob to the correct position to ignite.

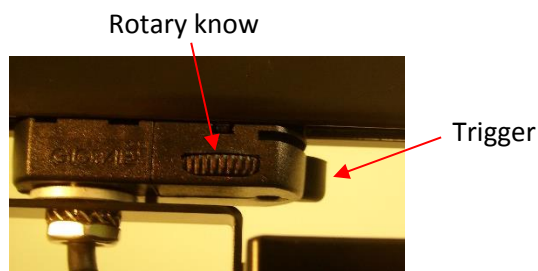

Luminous intensity adjustment

- The potentiometer located on the supply module allows the light intensity to be adjusted between 0 and 100%.

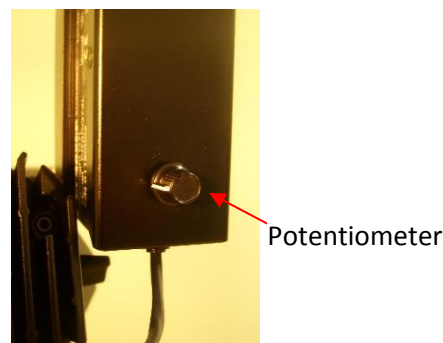

Bluetooth USB dongle installation



It is essential to have administrator rights on the computer

1. Download the BLED112 driver on **www.eurosep.com**,
2. File will appear as a **.zip** file in your **Downloads** folder,
3. Right-click on the file and **Extract** it into the **Downloads** folder,
4. Plug in the BlueGiga BLE dongle. It may take a few re-insertions, or switching USB ports, for your PC to see it,
5. Click **Start** menu and right-click on **computer**,
6. Click **Manage**,
7. Click **Device Manager** in left pane,
8. In device manager window, expand categories and locate the dongle. If you have never installed the driver, the dongle will appear under "**Other**",
9. Right-click on the device name and select **Update Driver Software**,
10. Click **Browse my computer for driver software**,
11. Click **Browse** and navigate to the Downloads/BLED112.../wondrv folder and click **OK**,
12. Click "**Next**" button to install the driver.



Installation of the control panel software



It is essential to have administrator rights on the computer.

1. Download the control software on **www.eurosep.com**,
2. File will appear as a **.exe** file in your **Downloads folder**,
3. Right click on the file and select **Open**,
4. Read and **accept** License Agreement. Click **Next**,
5. Click **next** to create desktop shortcut,
6. Click **Install** to begin the installation process,
7. Select **Finish** to complete the installation.

Adding a secure network



BEFORE YOU CAN DETECT AND PILOT PROJECTORS, IT IS NECESSARY TO PERFORM THE FOLLOWING OPERATIONS:

1. Select the **“Settings”** Tab,
2. Select **Add** in **Secure Network Management**,
3. Enter the **“Secure groupe name”** : **eurosep** and the password : **eurosep1234**
4. Click **OK**.



When commissioning projectors, it is the entire responsibility of the user to implement his personalized secure network (see **“Bluetooth Low Energy Projector Software Manual”**, section 13.2 Secured Network Management).

For any further information, contact:

EUROSEP Instruments – Technical department Phone: 33 (0)1.34.22.95.22


Apple Smartphone App



App installation

1. Open the **App Store** on your iPhone smartphone,
2. Search the **XIMtroller** app, then **Install**.

How to use the XIMtroller app :

1. Click **XIMtroller**,
2. Click  on the right top part of the smartphone screen,
3. Click **Add a new secure network**,
4. Enter the **“Secure groupe name”** : **eurosep** and the **“password”** : **eurosep1234**
5. Back to the main page by clicking on **< Group**
6. After a short period of time, projectors are now listed and can be managed.

Non-binding document, subject to change without notice. All trademarks are the property of their respective manufacturer.
Copyright © November 2019 par **EUROSEP** Instruments – PRSPG7L.D2.1A

EUROSEP Instruments

BP 38233 Cergy Saint Christophe
F-95800 Cergy Pontoise Cedex (France)
Tel : 33 (0)1 3422 9522 – Fax : 33 (0)1 3422 9532
e-mail : eurosep@eurosep.com – Internet : <http://www.eurosep.com>