



Spotlight Q7E Serie


Bluetooth LED Leaf Barndoor Projector



Quick Start Manual


Installation into the 2/3 circuit track

- Slide the 2/3 circuit track module into a compatible circuit track,
- Pull the trigger to fix the position,
- Turn the rotary knob to the correct position to ignite.

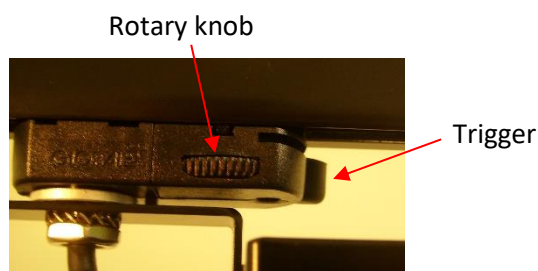

Luminous intensity adjustment

- The potentiometer located on the supply module allows the light intensity to be adjusted between 0 and 100%.

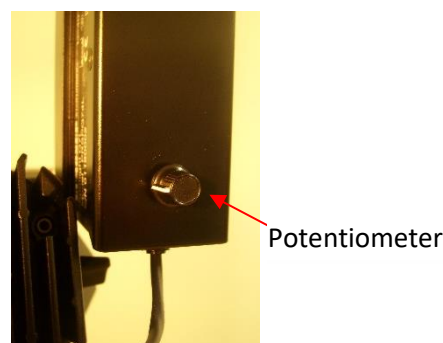

Bluetooth USB dongle installation



It is essential to have administrator rights on the computer.

1. Download the BLED112 driver on www.eurosep-museum.com,
2. File will appear as a .zip file in your **Downloads** folder,
3. Right-click on the file and **Extract** it into the **Downloads** folder,
4. Plug in the BlueGiga BLE Dongle. It may take a few re-insertions, or switching USB ports, for your PC to see it,
5. Click **Start** menu and right-click on **Computer**,
6. Click **Manage**,
7. Click **Device Manager** in left pane,
8. In Device Manager window, expand categories and locate the dongle. If you have never installed the driver, the dongle will appear under "**Other**",
9. Right-click on the device name and select **Update Driver Software**,
10. Click **Browse my Computer for driver software**,
11. Click **Browse** and navigate to the Downloads/BLED112.../windrv folder and click **OK**,
12. Click **Next** button to install the driver.



EUROSEP

Instruments

Installation of the control panel software



It is essential to have administrator rights on the computer.

1. Download the control panel software on **www.eurosep-museum.com**,
2. File will appear as a **.exe** file in your **Downloads folder**,
3. Right-click on the file and select **Open**,
4. Choose the language of installation,
5. Read and **Accept** License Agreement. Click **Next**,
6. Choose the destination folder. Click **Next**,
7. Click **Next** to create desktop shortcut,
8. Click **Install** to begin the installation process,
9. Select **Finish** to complete the installation.

Adding a secure network



BEFORE YOU CAN DETECT AND PILOT PROJECTORS, IT IS NECESSARY TO PERFORM THE FOLLOWING OPERATIONS:

1. Right-click on **Site** on the upper left side of the screen and select **Manage Networks**,
2. Select **Add**,
3. Enter the "Name": **eurosep** and the "Password": **eurosep1234**
4. Check the box **Compatible with Legacy**
5. Click **OK**.
6. Close window by clicking the cross.



When commissioning projectors, it is the entire responsibility of the user to implement his personalized secure network.

Apple Smartphone App



App installation

1. Open the **App Store** on your Iphone smartphone,
2. Search the **XIMtroller** app, then **Install**.

How the use the XIMtroller app:

1. Click **XIMtroller**,
2. Authorize Bluetooth access,
3. Click **Settings** on the right top part of the smartphone screen,
4. Click **Select Site & Network** then click **Add Network**,
5. Enter the following values:

Location Name:	your choice
Network Name:	eurosep
Network Password:	eurosep1234
6. Check the **Legacy** box then click **Add**
7. Back to the main page by clicking 2 times on < then click **Lighting**,
8. After a short period of time, projectors are now listed and can be managed.

Non-binding document, subject to change without notice. All trademarks are the property of their respective manufacturer.

Copyright@ June 2022 par **EUROSEP** Instruments – PRSPQ7E.D2.3A

EUROSEP Instruments

BP 38233 Cergy Saint Christophe

F-95800 Cergy Pontoise Cedex (France)

Tél : 33 (0)1 3422 9522 - Fax : 33 (0)1 3422 9532

E-mail : eurosep@eurosep.com - Internet <http://www.eurosep.com>